



Normal Duty
Eccentric Collar Locking
Inch Bolt Holes

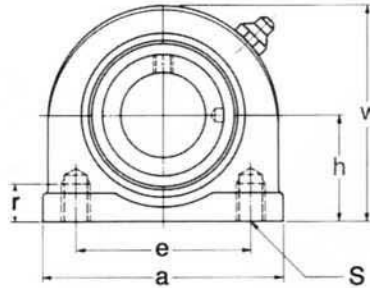

Unit No.	Shaft Dia.		Dimensions inch / mm										Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	h	a	e	b	S	r	w	Bi	n	m			
HCTB 201-8 202-10 204 204-12	1/2 5/8 3/4	20	1-5/16 33.3	2-7/8 73	2 50.8	1-1/2 38.1	3/8-16	1/2 12.7	2-9/16 65.1	1.713 43.5	0.669 17	1-3/64 26.5	HC 201-8 202-10 204 204-12	TB204	1.41 0.64
HCTB 205 205-14 205-15 205-16	7/8 15/16 1	25	1-7/16 36.5	3 76.2	2 50.8	1-1/2 38.1	3/8-16	1/2 12.7	2-13/16 71.4	1.744 44.3	0.685 17.4	1-1/16 26.9	HC 205 205-14 205-15 205-16	TB205	1.85 0.84
HCTB 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	1-11/16 42.9	4 101.6	3 76.2	1-1/2 38.1	7/16-14	5/8 16	3-3/8 85.7	1.902 48.3	0.717 18.2	1-3/16 30.1	HC 206 206-17 206-18 206-19 206-20	TB206	2.86 1.3
HCTB 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	1-7/8 47.6	4-1/4 107.9	3-1/4 82.5	1-7/8 47.6	1/2-13	3/4 19	3-3/4 95.3	2.012 51.1	0.740 18.8	1-17/64 32.3	HC 207 207-20 207-21 207-22 207-23	TB207	4.00 1.82
HCTB 208 208-24 208-25	1-1/2 1-9/16	40	1-15/16 49.2	4-5/8 117.5	3-1/2 88.9	1-7/8 47.6	1/2-13	3/4 19	3-15/16 100.0	2.217 56.3	0.843 21.4	1-3/8 34.9	HC 208 208-24 208-25	TB208	4.62 2.1
HCTB 209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	2-1/8 54.0	5 127.0	3-3/4 95.3	2 50.8	1/2-13	3/4 19	4-1/4 107.9	2.217 56.3	0.843 21.4	1-3/8 34.9	HC 209 209-26 209-27 209-28	TB209	5.17 2.35
HCTB 210 210-30 210-31 210-32	1-7/8 1-15/16 2S	50	2-1/4 57.1	5-1/2 139.7	4 101.6	2 50.8	5/8-11	7/8 22	4-5/8 117.5	2.469 62.7	0.969 24.6	2-27/32 46.8	HC 210 210-30 210-31 210-32	TB210	6.60 3.0